CORRES. CONTROL . INCOMING LTR NO.

00142 RFQ5

DUE DATE ACTION

285 Mai 22 A T C Department of Energy

UUNI PERBERG ROCKY FLATS PROJECT OFFICE 10808 HIGHWAY 93, UNIT A

10808 HIGHWAY 93, UNIT A GOLDEN, COLORADO 80403-8200

MAR 1 7 2005

05-DOE-00119

•		Ē
DIST.	LTR	ENC
BERARDINI, J.H.	X	$\overline{\mathbf{x}}$
BOGNAR, E.S.	X	X
BROOKS, L.	X	X
CARPENTER, M.	X	Χ
CIUCCI, J.A.		
CROCKETT, G. A.		
DECK, C. A.	\mathbf{x}	X
DEGENHART, K. R.	X.	\mathbf{x}
DEL VECCHIO, D.		
DIETER, T. J.		
FERRERA, D. W.	X	<u> </u>
GIACOMINI, J. J.		
GILPIN, H.		
LINDSAY, D. C.	\mathbf{x}	Χ
LONG, J. W.		
MARTINEZ, L.A.	_ <u>X</u> _	_X_
NAGEL, R. E	LX	<u> </u>
NESTA, S.	$\perp X_{\perp}$	<u>X</u>
NORTH, K.		
SHELTON, D. C.	_X_	X
SPEARS, M. S.	X	X
TUOR, N. R.	بيدا	Υ
WIEMELT, K.	<u> </u>	
WILLIAMS, J. L.	I	-
ZAHM, C.	X	X
		
Ward, D	<u> </u>	<u> </u>
**************************************	H-,-	
Freibothic	<u> </u>	~
	-	 .

Mr. Steven H. Gunderson

Rocky Flats Cleanup Agreement Project Coordinator Colorado Department of Public Health and Environment 4300 Cherry Creek Drive South Denver, Colorado 80246-1530

Dear Mr. Gunderson:

Please find enclosed a completed Rocky Flats Cleanup Agreement Type 2 Building Disposition Closeout Report provided for your information for Building 705, a former ceramics and coating laboratory.

Questions may be directed to Gary Morgan, Rocky Flats Project Office, at (303) 966-6003.

CALL BARTHER ! Sincerely,

> Joseph A. Legare, Director RFPO Project Management

Enclosure

cc w/o Encl.:

S. Nesta, K-H RISS Env

C. Freiboth, K-H RISS D&D

K. Wiemelt, K-H RISS D&D

M. Aguilar, USEPA

D. Abelson, RFCLOG

cc w/Encl.:

G. Morgan, RFPM, RFPO

D. McCranie, HQCPM, RFPO

Administrative Record

DOE ORDER #

Ref. Ltr. #

5400.

Corres. Control RFP

ADMIN RECORD

MAR 2 2 2005



FEB 2 1 2005

05-RF-00146

Gary Morgan, Functional Lead Cadre Project Management Division DOE, RFPO

TRANSMITTAL OF THE FINAL CLOSEOUT REPORT FOR BUILDING 705 - DWF-014-05

Enclosed are four copies of the Final Closeout Report for the Type 2 Building 705.

The report is submitted to document completion of Deactivation and Decommissioning activities for Building 705. Transmittal to the Colorado Department of Health and Environment (CDPHE) and the Environmental Protection Agency (EPA), in accordance with the Rocky Flats Clean-Up Agreement (RFCA), is requested.

If you have any questions, please contact Steve Nesta at extension 6386.

Dennis W. Ferma

Dennis W. Ferrera Vice President and Project Manager Remediation, Industrial D&D, and Site Services

SMN:pvt

Enclosure: As Stated

Orig. and 1 cc - Gary Morgan

CC:

Joe Legare

Light to be a serviced a

Charles Alexander

Table of Contents

e transfer i de la compania del compania del compania de la compania del compania

I.	INTRODUCTION TO THE PART OF TH	1
11.	ACTION DESCRIPTION	
111.	VERIFICATION ACTION GOALS WERE MET	2
IV.	VERIFICATION OF TREATMENT PROCESS	3
V.	RADIOLOGICAL ANALYSIS	3
VI.	DEMOLITION SURVEY RESULTS	4
VII.	WASTE STREAM DISPOSITION	4
VIII.	DEVIATIONS FROM THE DECISION DOCUMENT	5
	DESCRIPTION OF SITE CONDITION AT END OF DECOMMISSIONING	
X.	DEMARCATION OF EXCAVATION	5
XI.	DEMARCATION OF WASTES LEFT IN PLACE	5
XII.	DATES AND DURATION OF SPECIFIC ACTIVITIES	5
XIII.	FINAL DISPOSITION OF WASTES	5
XIV.	NEXT STEP FOR AREA	5

an bergan den skriver Gregorie eta skriver

APPENDICIES

- 1. Maps
- 2. Contact Records
- 3. PDSR
- PDSR
 CDPHE RSOP Notification Concurrence

I. Introduction

Building 705 Description

Building 705 was constructed in 1966 as the R&D ceramics laboratory and the coatings laboratory. Building 705 was a 3700 sq. ft., single story structure with a high bay laboratory area. The building was constructed with concrete block walls, a poured-in-place concrete slab floor, and a metal roof with built-up roofing. Two additions were constructed: in 1969, the measurement room (Room 103) south of the original structure, and in 1975, the two-story mechanical room east of the original structure. In 1991, the sanitary floor drains were grouted.

The following utilities; electric, plant sanitary, plant water, and plant steam serviced Building 705. Fire protection was provided by overhead sprinkler system, and wall mounted fire extinguishers. The building originally had hydrogen, helium, nitrogen and oxygen gas supplied by tanks located on the exterior on the south side of the building. Tanks were remove prior to demolition.

Based on the analysis of radiological, chemical and physical hazards contained in the RLCR, Building 705 was classified as a RFCA Type 2 facility pursuant to the RFETS Decommissioning Program Plan (DPP; K-H, 1999). The Type 2 classification was based on widespread beryllium contamination throughout the facility.

Closure of the facility was completed in accordance with the Rocky Flats Cleanup Agreement Standard Operating Protocol (RFCA RSOP) for Component Removal, Size Reduction and Decontamination Activities and Facility Disposition. Integrated Work Control Program (IWCP) procedures were followed during building decontamination and decommissioning.

II. Action Description

Utility Disconnect

Electrical isolation was performed on all original feeds to systems and equipment associated with B705. Isolation of electrical power was performed by Lock-Out/Tag-Out, then isolating the main power to the facility by cutting, removing or air-gapping electrical systems in the facility. This "cold and dark" process greatly reduces the potential for electric shock injuries to worker during interior dismantling, beryllium decontamination, and asbestos abatement activities. Use of light stands and external generators provided interior lighting for these activities.

Potable water feed to the facility was discontinued, and isolated seven feet below final grade. All sanitary fixtures were disconnected, and sewer lines were flushed with a volume of high-pressure water equal to approximately 10 times the volume of the pipe and the pipes were grouted. Sewer lines were then isolated six feet below grade at a manhole exterior to the facility, along the main sewer line. This was accomplished by grouting the sewer line at the manhole.

Steam and condensate lines were isolated exterior to the facility. Steam service to the plant was discontinued and steam lines were air gapped at Building 443 (Steam Plant) in July, 2003. See Article 1 of Appendix 1 for utility disconnects.

Contaminants of Concern

Contaminants of concern included asbestos and beryllium.

Characterization was conducted in accordance with the RLCP and PDSP. CDPHE-certified asbestos inspectors conducted the asbestos inspections and sampling in accordance with the Asbestos Characterization Protocol, PRO-563-ACPR, Revision 1. Building materials suspected of containing

The state of the s

I sa chilibilità della celebana constitutione di ante in high con de principi del richisati So. 1904 della tel contignati ashestos were identified for sampling at the discretion of the inspectors. There was adequate historical and process knowledge to conclude that beryllium was used or stored in this building, therefore, random and biased beryllium sampling was performed in accordance with the RLCP and the Beryllium Characterization Procedure, PRO-536-BCPR, Revision 0, September 9, 1999.

Such that the same

معطا بين دراي المرقب المرأو المراوا المراد

Asbestos Abatement

Kaiser-Hill performed asbestos abatement activities. Abatement activities commenced October 2003, and were completed March 2004, and included the removal of asbestos-containing transite panels, and asbestos-containing "Thermal System Insulation" (TSI).

During asbestos removal operations, the building was posted as an asbestos control area. The area was precleaned using HEPA-filtered vacuums. Only qualified workers with current asbestos training, physicals, and respirator training/fit testing were utilized to perform abatement activities.

During abatement activities, Personal Protective Equipment (PPE) consisted of disposable coveralls, disposable booties, hoods, gloves, and full-face, negative pressure, HEPA-filtered respirators. PPE was donned prior to entering the work area. Upon completion of work, respirators were wet-wiped and removed, and all other PPE was removed and bagged as asbestos waste for disposal.

Total quantities of asbestos containing material (ACM) waste removed from the facility are noted in Section VII, Waste Stream Disposition.

Beryllium Removal

Kaiser-Hill performed beryllium removal activities. Activities commenced February 2004 and were completed on August 2004. Due to the nature of the facility-wide presence of beryllium, interior strip out was an integral part of beryllium removal, and was done concurrently.

Beryllium removal activities included the removal of beryllium-contaminated equipment as well as supply and exhaust ductwork in the laboratory and office areas of the building. This was accomplished through bagging, shrink-wrapping, foaming, and/or applying fixative to the various contaminated components. Removed components were disposed of as beryllium contaminated waste.

Upon removal of contaminated systems, the entire building interior was wiped down using a wetting solution and disposable cloths. After completion of Pre-Demolition Surveys, the interior of the facility was sprayed with a fixative to reduce the potential for release of residual beryllium during demolition.

During beryllium removal activities, Personnel Protective Equipment consisted of disposable coverall, two sets each of disposable gloves and booties, two disposable hoods, and powered air purifying respirators. PPE was donned prior to entering the work area. Upon completion of work, respirators were wet wiped and removed, with all other PPE was bagged out and disposed of as waste.

Total quantities of beryllium-contaminated waste removed from the facility are noted in Section VII, Waste Stream Disposition.

RCRA/TSCA

Building 705 did not contain any RCRA or TSCA units requiring closure. For disposition of waste streams, please see Section VII.

III. Verification Action Goals Were Met

Four action objectives were established for Building 705 removal project prior to beginning demolition:

or the same and all states

Decontamination of the facility (as necessary) to support release for decommissioning per site approved procedures.

Model Miller

The facilities' primary structures were decontaminated to free-release standards and disposed of in an off-Site landfill. A fixative was applied to the beryllium remaining in the facility to reduce the possibility of a release during demolition activities.

Decominissioning of the Building 705 facility in accordance with RFCA and applicable or relevant and appropriate requirements.

RFCA and other relevant requirements were complied with throughout the project. Consultations with the LRA were conducted throughout the project.

Complete decontamination and decommissioning activities in a manner that is protective of Site workers, the public and the environment.

with the form of the state of

Decontamination and decommissioning activities were completed within regulatory requirements. Air sampling for beryllium was conducted during demolition activities (see Section VI). Dust control measures were implemented during demolition, using wet methods via fire hydrants and fire hoses. No injuries or releases to the environment occurred during the project.

Demolish the Building 705 facility structures and utilities to 3' below final grade.

The facility superstructure and slab were completely removed during demolition. Underground utilities were removed to a minimum of 3' below grade. See Appendix 1 Utilities Disconnects for the specific location of disconnects.

IV. Verification of Treatment Process

This section is not applicable.

V. Radiological Analysis

Building 705 was characterized for radiological hazards per the PDSP. Radiological characterization was performed to define the nature and extent of radioactive materials that may be present on the facility surfaces. Measurements were performed to evaluate the contaminants of concern. Based upon a review of historical and process knowledge, building walk-downs, and MARSSIM guidance, a Radiological Characterization Plan was developed during the planning phase that describes the minimum survey requirements (refer to the RISS Characterization Project files for the Building 705 Radiological Characterization Plan). One radiological survey unit package was developed for the interior of Building 705: 705001 Individual radiological survey unit packages are maintained in the RISS Characterization Project files.

The Building 705 survey unit package was developed in accordance with Radiological Safety Practices (RSP) 16.01. Radiological Survey/Sampling Package Design, Preparation, Control, Implementation and Closure. Total surface activity (TSA), removable surface activity (RSA), and scan measurements were collected in accordance with RSP 16.02 Radiological Surveys of Surfaces and Structures. Radiological survey data were verified, validated and evaluated in accordance with RSP 16.04, Radiological Survey/Sample Data Analysis. Quality control measures were implemented relative to the survey process in accordance with RSP 16.05, Radiological Survey/Sample Quality Control.

A STATE TO STATE OF THE STATE O

Building 705 Interior (Survey Unit 705001)

Building 705 interior was classified as a MARSSIM Class 2 Survey Unit because this building was not expected to contain residual radioactivity greater than the DCGL_w, but had a potential for low levels of contamination. A total of 21 TSA measurements (19 random grid and 2 QC) and 19 RSA measurements (19 random grid) were taken and scan surveys performed. Alpha scan surveys of 50% of the floor (216 m² minimum) and 25% of the wall and ceiling interior surfaces (474 m² minimum) at biased locations were performed. None of the measurements or scans indicated elevated activity above applicable transuranic DCGL values.

Building 705 Exterior:

The Building 705 exterior was radiologically surveyed during the RLC in accordance with PDSP requirements and met the PDSP radiological release limits.

VI. Demolition Survey Results

Ambient Monitoring for Beryllium

The ambient air around the B705 Demolition Project was monitored for beryllium during demolition. Concentrations were based on an 8 hour Time Weighted Average (TWA) and were compared to the Permissible Exposure Limit (PEL) for Be. All readings for beryllium came back as non-detect.

Summary of Airborne Radioactivity Sampling

Air sampling was not required during demolition. Building 705 had been released from radiological controls prior to demolition.

VII. Waste Stream Disposition

Sanitary Disposal	Market State
Disposal Site:	BFI Tower Road
Waste Volume (yd3):	1496
Waste Weight (tons):	967.5
Additional Information:	Concrete and structural steel from building
<u> Hazardous Disposal</u>	
Disposal Site:	Kettleman Hills Facility, Kettleman City, CA or Bethlehem Apparatus Co, Hellertown, PA
Waste Volume (yd³):	Minor amounts
Additional Information:	Electronic circuit boards, thermostats, exit signs, batteries, fluorescent light bulbs and any other RCRA hazardous components were removed and taken to the RFCA temporary unit for combination with like waste streams for proper disposal.
TSCA Waste Disposal	DELE ALTERIA
Disposal Site:	BFI Foothills Hwy. 93
Waste Volume (yd³):	Minor amounts (Bulk Product Waste)
Additional Information:	Fluorescent ballasts, including non-leaking PCB ballasts, remained in the building and were disposed of with the building demolition debris. Leaking ballasts were removed and taken to a RFCA temporary unit

	for combination and disposal with like wastes.
Beryllium Waste Disposal	
DISPOSAL SITE:	BFI Tower Road
Waste Volume (yd3)	210
Additional Information:	
Asbestos Waste Disposal	
Disposal Site:	BFI Tower Road
Waste Volume (yd3):	15
Additional Information:	m to the state of

VIII. Deviations From the Decision Document

No deviations from the decision document were noted.

IX. Description of Site Condition at End of Decommissioning

The B705 structure and slab were removed during demolition. All associated drains, piping, and utilities were removed to a minimum of 3' below grade. See attachment I, Utility Disconnects.

X. Demarcation of Excavation

This section is not applicable.

XI. Demarcation of Wastes Left in Place

No waste was left in place.

XII. Dates and Duration of Specific Activities

Activity	Responsible Contractor	<u>Dates</u>
Asbestos Abatement	Kaiser Hill	10/03-3/04
Interior Strip-out/Beryllium Removal	Kaiser Hill	2/04-8/04
Demolition	Kaiser Hill	7/04-9/04
Demobilization	Kaiser Hill	9/04

XIII. Final Disposition of Wastes

See Section VII.


XIV. Next Step for Area

Final grading and revegetation will be conducted when the B776/777 project is complete. Coconut mat and staked waddles have been placed in the area for erosion control until final grading and revegetation are complete.

Appendix 1

Maps

Article 1 -- B705 Plot Plan/Utilities Disconnects

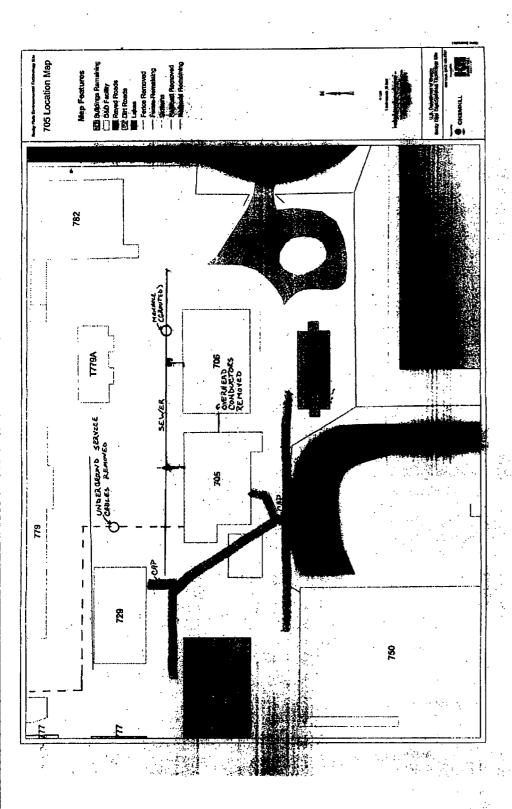

Appendix 2 Rocky Flats Environmental Technology Site Contact Records

Primary Site Contact

Vern Guthrie

Primary Reg Contact

Dave Kruchek

Seconday Site Contact

Unit

Building

Site Phone

*7419

CDPHE

Purpose

Document discussions during the monthly Windshield Tour meeting

Discussion

During the monthly Windshield meeting with Steve Tower and Dave Kruchek, the following items were discussed. Building 705 status/information on Hazard Reduction activities: - Gary Konwinski provided a complete presentation/review of the work package being used to complete the first three phases of the work. Copies of the package were provided to Steve Tower and Dave Kruchek - Four phases of work are planned. 1. Remove office material and equipment 2. Remove material in the Be control area that has not been listed as containing contamination/potentially contaminated 3. Remove all remaining equipment, except items in the coatings laboratory and possibly the capital equipment in the facility 4. Decontaminate and removal of all equipment in the coatings lab - Dave Kruchek agreed that the work for phases 1 and 2 should proceed based upon the information/methods identified in the package. It was also agreed that prior to beginning phase 3 work, another walk-down would be completed with DOE and the State. The exception will be that some of the items within the phase 3 effort may be sprayed with CC Wet encapsulate during phase 2 work. - Once the first three phases are complete, a better review can be performed of the work required for phase 4. Another review process will be necessary with DOE and the State

Number

465

Date and Time

8/14/2001 11:00:00 AM

Primary Site Contact

Vern Guthrie

Primary Reg Contact

Dave Kruchek

SecondaySite Contact

Seconday Reg Contact

Unit

Building

Site Phone

Agency

705

***7419**

CDPHE -

Purpose

Document discussions during tour of Building 705

Discussion

On Tuesday, August 14, 2001, at 11:00 AM, a tour was conducted of Building 705. This facility contains areas where Be is present. The task is to cleanout the building in preparation for characterization and closing the facility. Attending the walkdown was Dave Kruchek, Steve Tower, Gary Konwinski, Margaret Kimokeo and Vern Guthrie. Building 705 work is divided into four (4) Phases. Phase I and II are complete and Phase III is 50% complete. RISS and CDPH&E previously agreed to proceed with work to the point of "fixed equipment" removal. Today's review/tour was to evaluate the completed work. Based upon this review, it was agreed that the second half of Phase III (fixed equipment removal) would proceed, as well as characterization of the laboratory area (a portion of the Phase IV work). When characterization data is complete, and prior to clean-out of the laboratory area, further discussions would be necessary.

Number

518

Date and Time

11/15/2001

Primary Site Contact

Vern Guthrie

Primary Reg Contact

Dave Kruchek

SecondaySite Contact

Seconday Reg Contact

Unit

Building

Site Phone

Agency

705

*7419

CDPHE

Purpose

Document a phone conversation regarding planned work west of Building 705

Discussion

On November 14, 2001, Dave Kruchek and Vern Guthrie discussed the work being planned for the area between Building 705 and Building 778. Located in this area is a cooling tower associated with Building 705. Building 707/776/777 management has requested the removal of the tower, as the area is needed as a staging location for cargo containers. The required work and responsibilities are: 1) RISS/RFCSS - Disconnect electrical and water supplies between Building 705 and cooling tower. - Remove piping as required back to Building 705. - Prepare the Property Release Evaluation (PRE) for the unit and perform the required surveys 2) Buildings 707/776/777 - Perform asbestos evaluations on piping and remediate as necessary. - Remove and dispose of cooling tower. - Sample concrete pad for free release. - Develop soil disturbance permit for pad and piping removal. - Remove concrete pad. If not releasable, place in proper waste containers. Dave Kruchek did not have issues with accomplishing the removal of the cooling tower utilizing the PRE process and removal of the pad if properly sampled for free release. If the pad cannot be free released, then disposal will follow the proper site process.

Number

1381

Date and Time

7/29/2004 7:00:00 AM

Primary Site Contact

J.R. Marschall

Primary Reg Contact

Dave Krucheck

SecondaySite Contact

Seconday Reg Contact

Unit

Building

Site Phone

Agency

705

CDPHE

Purpose

Dirty Demolition of Building 705

Discussion

Prior to the beryllium abatement process in Building 705, beryllium concentration was as high as 779.0 ug/100cm2 with a number of samples showing concentrations in the range of 8.5 to 145.0 ug/100cm2. The beryllium cleaning process in Building 705 included vacuuming, then an application of CC Wet, followed by wiping with clean dry towels in areas not exceeding 6 to 8 square feet at a time. After that type of thorough cleaning from top to bottom, ninety subsequent beryllium surveys indicated five spots with concentrations between 1.0 and 8.7 ug/100cm2 and ten spots between 0.2 and 0.99 ug/100cm2. The remaining 75 surveys were below 0.2 ug/100cm2. J.R. Marschall contacted Dave Kruchek to request, despite the fifteen elevated surveys, that the entire building be sprayed with a fixing agent as was the original plan and proceed to demolition. Dave agreed to this as long as beryllium monitoring is conducted during the demolition and load out process, and the waste generated during demolition will be sent off-site and not recycled or left on site.

Appendix 3 B705 Characterization Reports

SURVEY UNIT 705-2-001 RADIOLOGICAL DATA SUMMARY - PDS

Survey Unit Description: B705 (Exterior)

705-2-001 PDS Data Summary

Total Surf	ace Activity M	<u>easurements</u>	Remov	able Activity	Measurements
•		• • • •			
	25	25		25	25
	Number Required	Number Obtained		Number Required	Number Obtained
MIN	-10.5	ấpm/100 cm²	MIN	-0.9	dpm/100 cm²
MAX	73.5	фт/100 cm²	MAX	6,7	₫pm/100 cm²
MEAN	30.0	dpm/100 cm ²	MEAN		dpm/100 cm²
STD DEV	21.2	ஷ்=/100 cm²	STD DRV		dp==/100 cm²
RANSURANIC	·	•			
DCGL _W	100	dpm/100 cm²	TRANSURANIC DCGL _W	20	dpm/100 cm²

SURVEY UNIT 705-2-001 TSA - DATA SUMMARY

Monufacturer:	NE Tech	NE Tech	NE Tech	NE Tech
Model:	DP-6	DP-6	DP-6	DP-6
Instrument ID#:	1	2	3	4
Serial #:	1366	3125 .	662	3107
Cal Due Date:	6/26/03	4/21/03	8/19/03	8/6/03
Analysis Date:	4/9/03	4/9/03	4/10/03	4/10/03
Alpha SIL (c/d):	0.209	0.215	0.223	0.21E ·
Alpha Bkgd (cpm)	4.7 .	1.3	, 3.3	2.7
Sample Time (min)	1.5	0,218	1.5	1.5
LAB Time (min)	15	· 1.5	1.5	1.5
MDC (dpm/199cm ²)	48.0	48.0	420	48.0

Sample Location ***********************************	Instrument IDE:	Sample Gross Counts	Sample Gross Activity —— (Apill/140cm2)	LAB Greek Counts (cpm)	LAB Gross Activity * (&pin/198cm2)	Sample Not Activity (dpm/100cm2) ^{1,2}
1	4	12.8	55.0	2.0	9.2	40.1
2	4	16.0	73.4	4.9	113	58.4
3	ı	14.0	67.0	3.3	15.8	52,0
4	4	3.3	15.1	دد	15.1	0.1
5	ì	13.3	53.6	4.0	19.1	41.6
6	1	11.3	54.1	3.3	15.8	39.1
7	3	1,0	4.5	5.0	22.4	-10.5
8	1	9,3	445	4.7	22.5	29:5
9	4	19.3	18. 5 "	33	15.1	73.5
. 10	4	7.0	32.I	3.0	13.8	17.1
11.	4 .	17.3	12.1	13	6,2	67.0
12	4	4,0	18,3	13	6.D	3.4
13	3	8.0	35.9	8.0	35.9	20.9
14 '	3	10.0	44.8-	3.0	13,5	. 29.9
15	3	7.0	31,4	1.0	45	16.4
16	2	10.7	49.8	0.7	3.3	348
17	1 .	15.3	73,2	2.0	9,6	58.2
. 18	3	6.7	30,0	4.0	17.9	15.1
19	3	8.0	35.9	6.0	26.9	20.9
20	3	á.D	26.9	2.0	9.0	119
21	3	9,0	40,4	4.0	17.9	25.4
22	1	5.3	25.4	2.0	9.6	104
23	4	9.3	42.7	2,0	9.2	27.7
24	1	8.0	38.3	33	15.8	233
25	i	10.7	· 51.2	4.7	22.5	36.2
Average LAB word to amb	tract from Gross Sample Ac				15.0	Sample LAB Average
-					MIN	-10.5
		•			·· MAX	73.5
					MEAN	30.0
					SD	21.2

24 QC	3	ji.)	65.9	4	17.9	54.0
25 QC	,	8	35.9	IJ,	5.8	-340
- Average QC LAB used to	subtract from Gross Sample	Activity			11.9	QC LAB Average
					MON	24.0

SURVEY UNIT 705-2-001 RSC - DATA SUMMARY

Mannfacturer:	Eberline	Eberline	Eberline
Model:	SAC-4	SAC-4	. SAC-4
Instrument ID#:	5	6	7
Serial #:	1164	852	.971
Cal Due Date:	6/17/03	7/9/03	8/6/03
Analysis Date:	4/15/03	4/15/03	4/15/03
Alpha Eff. (c/d):	0.33	0.33	0.33
Alpha Bkgd (cpm)	0.3	0.3	0.3
Sample Time (min)	2	2	. 2
Bkgd Time (min)	10	10	10
1DC (dpm/100cm ³)	9.0	9.0	9.0

Sample Location Number	Instrument ID#	Gross Counts (cpm)	Net Activity (dpm/196 cm²)
1	5	1	0.6
2	6	4 .	5.2
3	7	0	-0.9
4	5	1	0.6
5	6	2	2.1
6	. 7	2	2.1
, 7	· 5	0	-0.9
8	6	1	0.6
9	7 ·	1	0.6
10	5	I	0.6
11	· 6	. 2	2.1.
12	7	1 .	0.6
13	5	1	0,6
14	6	2	2.1
15	7	2	2.1
16	5	5	6.7
17	6	2	2.1
18	7	0 ·	-0.9
19	5	1	0.6
20	6	1	0.6
21	7	0	-0.9
22	5	0	-0.9
23	6	0	-0.9
24	7	0	-0.9
25	;5	3 .	3.6
		MIN	-0.9
	ŀ	MAX	6.7
	t	MEAN	1.1
	·	SD	1,9
	ľ	Transuranie DCGL _W	20

Page 4 of 4

Asbestos Data Summary

Sample Number	Survey Map	Room	Material Sampled & Location	Analytical Results	
	Location	•		· •	
	Point				
705-040-03-315-101	1	1011	White paint on Concrete Mortar Unit (CMU) wall, east	None Detected	
705-044-08-315-192	2	101 A	White paint on CMU, cast wall	, None Detected	
703-049-08-215-103	.3	102	Yellow paint on CMU, south wall	None Detected	
703-040-05-213-104	4	104	White paint on CMU, north wali	None Detected	
705-040-03-215-105	5 .	105	White paint on CMU, north wall	None Detected	
705-040403-315-106	6 .	100	Orange paint on CMU, east wall	None Detected	
705-040803-215-107	7	100	Orange paint on CMU, north wall	3 % Chrysotile; 1.25 % Point Count	
705-040-08-215-108	8	101 D	Hard elbow on > 6" OD Condepsate line, white friable TSI	8 % Chrysotile; 2 % Amoslte; 3 % Crocidolite	
705-040808-\$15-109	9	101 D	Hard elbow on > 6" OD Heating Water Supply line; white triable TSI	8 % Chrysotile; 2 % Amosite; 3 % Crocidolite	
705-040803-315-110	10:	101 D	Hard elbow on < 6" OD Domestic Cold Water line, white friable TSI	8 % Chrysotile; 2 % Amoslte; 3 % Crocidolite	
703-040803-315-111.	11	101 F	Drywall, only	None Detected	
705-040803-315-112	12	101 F	Joint compound, only	None Detected	
703-040803-315-113	13	100	Joint.compound, only	None Detected	
705-040803-315-114	14	106	Hard elbow on < 6" OD Process Cold Water line, white friable TSI	Norse Detected	
705-040803-315-115	15	100	Base cove with brown adhesive	None Detected	

Beryllium Data Summary

Simple Number	Map Survey Point Location	Koore	Sample Decision P	: Gg/(derph)
	THE R. L.	Building 705	- RIN 04C0670	
205 020 50004 00 000	2	100	Floor, random	< 0.1
705-07262004-00-002	3	- 101	Floor, random	< 0.1
705-07262004-00-003	10	103	Floor, random	< 0.1
705-07262004-00-010	15	102	Floor, random	< 0.1
705-07262004-00-015	16	101	Floor, random	< 0.1
705-07262004-00-016	19	101	Floor, random	< 0.1
705-07262004-00-019	20	106.	Floor, random	< 0.1
705-07262004-00-020	20 22	206	Floor, random	< 0.1
705-07262004-00-022	23	100	Floor, random	, < 0.1
705-07262004-00-023	25	101	Floor, random	, < 0.1
705-07262004-00-025	25	-01:	Floor: random	< 0.1
		101	Floor, random	< 0.1
705-07262004-00-028	28	101	Floor, random	< 0.1,
705-07262004-00-029	29		Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-121	121	101	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-122	122	101	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-123	123	101	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-124	124	101	Ceiling components (i.e. piping & joists), biased.	< 0.1
705-07262004-00-125	125	101.	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-126	126	101	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-127	127	102	Ceiling components (i.e. piping & joists), trased Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-128	128	102	Ceiling components (i.e. piping & joists), biased Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-129	129	102		< 0.1
705-07262004-00-130	130	102	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-131	131	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-136	136	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-139	139	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-140	140	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-141	141	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-142	142	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-143	143	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-144	144	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-145	145	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-146	146	100	Ceiling components (i.e. piping & joists), biased	
705-07262004-00-147	147	100	Ceiling components (i.e. piping & joists), biased	< 0.1 < 0.1
705-07262004-00-148	148	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-149	149	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-150	150	100	Ceiling components (i.e. piping & joists), biased	
705-07262004-00-152	152	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-153	153	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-154	154	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-155	155	100	Ceiling compunents (i.e. piping & joists), biased	< 0.1
705-07262004-00-157	157	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-158	158	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-159	159	100	Ceiling components (i.e. piping & joists), biased	< 0.1
705-07262004-00-160	160	100	Ceiling components (i.e. piping & joints), biased	< 0.1
103-01202001-00-100		RIN 04Z2372 - Post	Wipe down-Pre Fixative	
705-08052004-314-001	201	100	Floor, biased	< 0.1
	202	100	Floor, biased	< 0.1
705-08052004-314-002	203	100	Floor, biased	< 0.1
705-08052004-314-003	204	100	Floor, biased	< 0.1
705-08052004-314-004	205	100	Floor, biased	< 0.1
705-08052004-314-005	205	100	Floor, biased	< 0.1
705-08052004-314-006	209	100	Floor, biased	< 0.1
705-08052004-314-009		100	Floor, biased	< 0.1
705-08052004-314-010	210	100	Floor, biased	< 0.1
705-08052004-314-011	211	DIN 04/107	K - Post Figative	
	- 	100	Floor, biased	< 0.1
705-08112004-00-01	301		Floor, biased	< 0.1
705-08112004-00-02	302	100	Gloor higged	< 0.1
705-08112004-00-03	303	100	Floor, biased	< 0.1
705-08112004-00-04	304	100	Floor, biased	< 0.1
705-08112004-00-05	305	100A .		